


LR 3032 XR

ENGLISH



TECHNICAL DATA

POWER SUPPLY	11 - 15 VDC
IDLING CURRENT	0.9A
MAX CONSUMPTION (2 ch 4 Ohms)	12 A
DISTORTION - THD	0.06 %
CONT. NOMINAL POWER (Tol. +10%; -5%) (2ch x 4 Ohms; 0.3% THD; 12 VDC)	30W+30W (RMS)
CONT. OUT POWER (2 ch 4 Ohms - 13.8 VDC)	35W+35W (RMS)
CONT. OUT POWER (2 ch 2 Ohms - 13.8 VDC)	55W+55W (RMS)
CONT. OUT POWER (1 ch 4 Ohms - 13.8 VDC) Bridge	110W (RMS)
BANDWIDTH	10 Hz - 160 KHz
CROSSOVER FREQUENCY	48 Hz - 4800 Hz
FILTER SLOPE	12 dB/oct. Butterworth
DAMPING FACTOR (4 Ohms)	120
RISE TIME	4.5 uS
S/N RATIO (W "A")	98 dBA
REMOTE IN	3 - 12 VDC
PRE INPUT SENSITIVITY	0.15 - 1.5 V RMS
PRE OUT GAIN	0dB
INPUT IMPEDANCE	15 KOhm
LOAD IMPEDANCE (stereo)	8 - 4 - 2 Ohm
LOAD IMPEDANCE (bridge)	8 - 4 Ohms
SIZE BxHxL mm	175 x 55 x 215
SIZE BxHxL inch	6.89 x 2.16 x 8.46

SERVICE CONNECTIONS

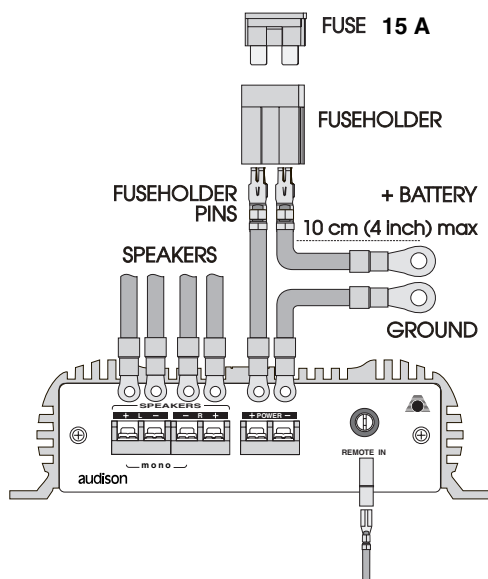

UNIT FIXING

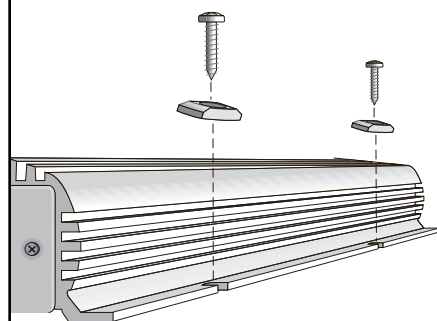


audison

OWNER'S MANUAL



Car power amplifier

LR 3032 XR

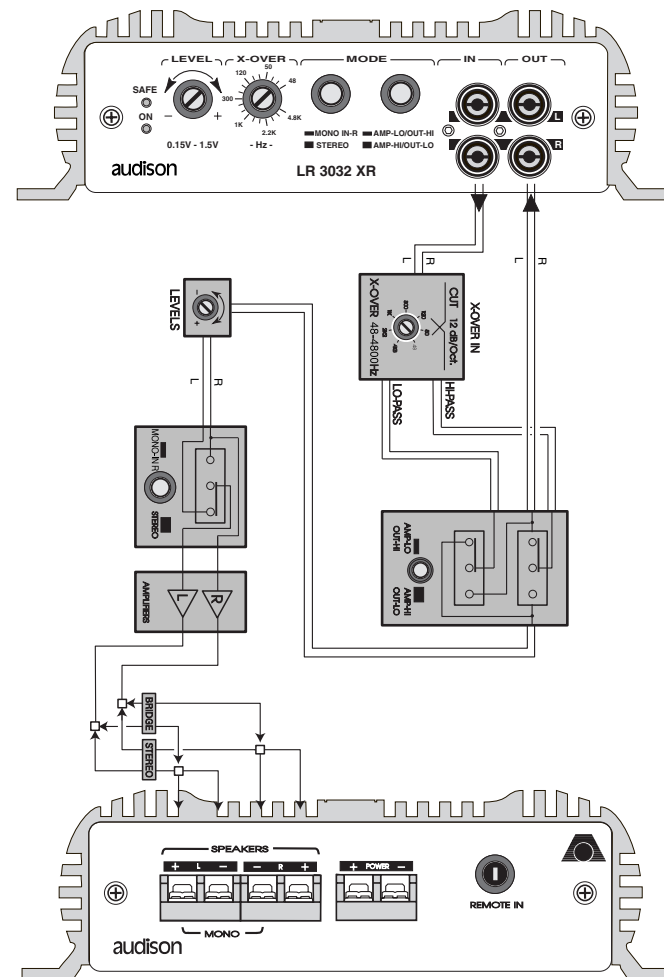

Cod. 10123820

LR 3032 XR - CONTROLS AND FUNCTIONS

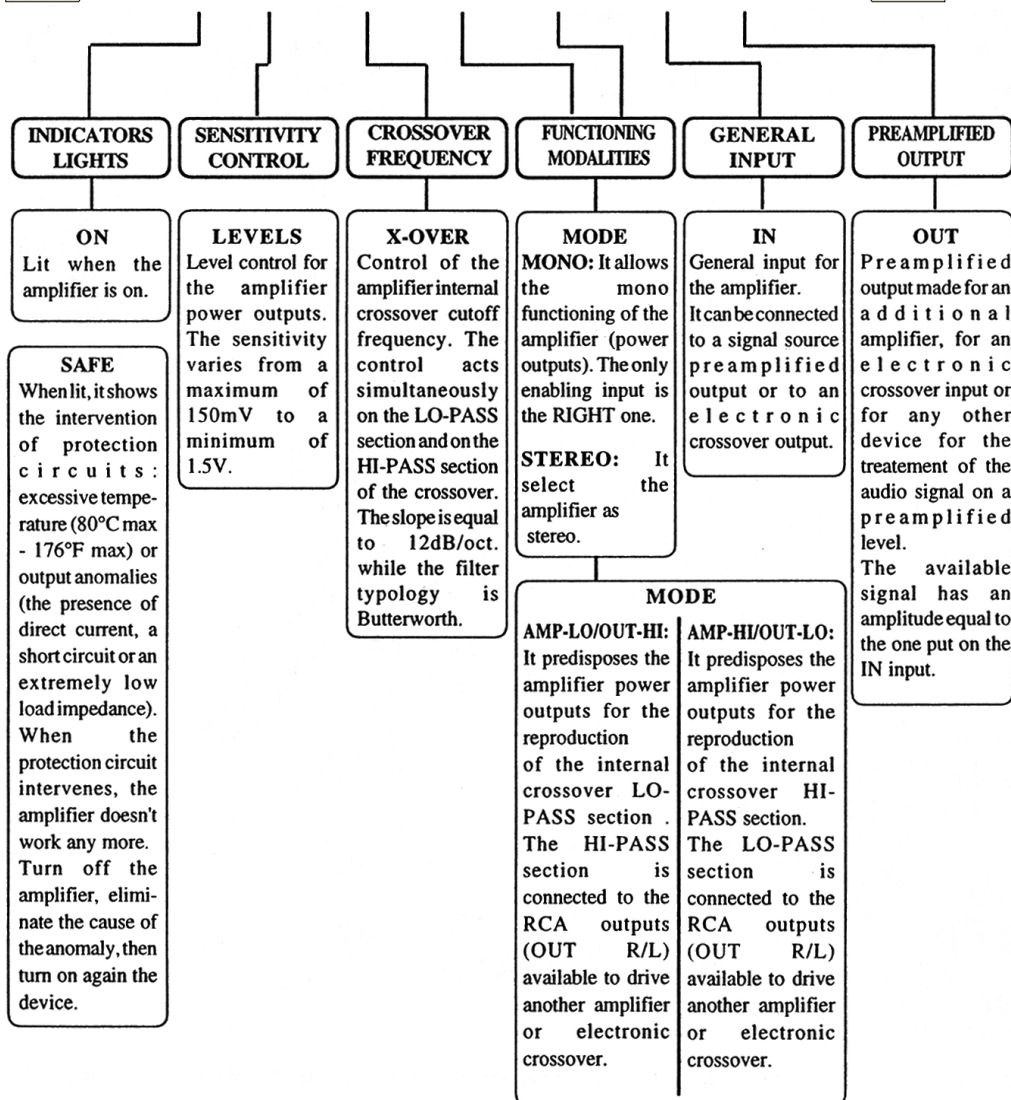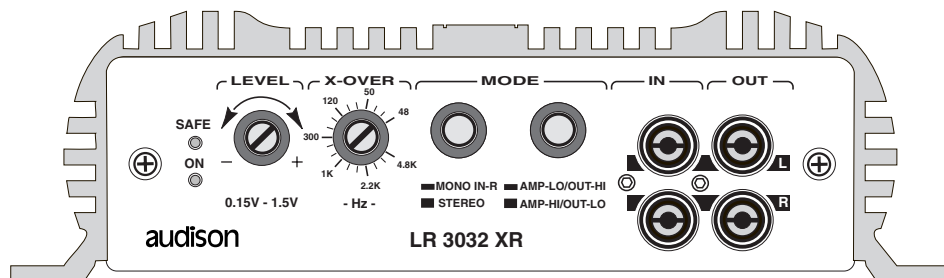

LR 3032 XR CONFIGURATION OF CONNECTING CLAMPS

